JC02 Rec'd PCT/PTO 18 DEC 2000

FORM PTO-1390
REV. 5-93

US DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE

# TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371

ATTORNEYS DOCKET NUMBER
**P00,1888**

U.S.APPLICATION NO. (if known, see 37 CFR 1.5)
09/719969

| INTERNATIONAL APPLICATION NO. | INTERNATIONAL FILING DATE | PRIORITY DATE CLAIMED |
|---|---|---|
| **PCT/DE98/01681** | 18 June 1998 | |

TITLE OF INVENTION
"METHOD AND DEVICE FOR TRANSMITTING INFORMATION USING VARYING CARRIER FREQUENCIES BY MEANS OF A FREQUENCY HOPPING METHOD"

APPLICANT(S) FOR DO/EO/US
Jürgen KOCKMANN and Olaf DICKER

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay.
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of International Application as filed (35 U.S.C. 371(c)(2))
   a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
   b. ☐ has been transmitted by the International Bureau.
   c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. §371(c)(3))
   a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
   b. ☐ have been transmitted by the International Bureau.
   c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
   d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).)
10. ☒ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C.371(c)(5)).

**Items 11. to 16. below concern other document(s) or information included:**

11. ☒ An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98; **(PTO 1449, Prior Art, Search Report)**.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31 is included. **(SEE ATTACHED ENVELOPE)**
13. ☒ A FIRST preliminary amendment.
    ☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
    a. ☒ Submittal of Drawings
    b. ☒ **EXPRESS MAIL #EL 655299254US, dated December 18, 2000.**

526 Rec'd PCT/PTO 18 DEC 2000

| U.S.APPLICATION NO. (if known, see 37 C.F.R. 1.5) | INTERNATIONAL APPLICATION NO. | ATTORNEY'S DOCKET NUMBER |
|---|---|---|
| 09/719969 | PCT/DE98/01681 | P00,1888 |

17. ☒ The following fees are submitted:

| | CALCULATIONS | PTO USE ONLY |
|---|---|---|
| **BASIC NATIONAL FEE (37 C.F.R. 1.492(a)(1)-(5):** | | |
| Search Report has been prepared by the EPO or JPO . . . . . $860.00 | | |
| International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) . . $700.00 | | |
| No international preliminary examination fee paid to USPTO (37 C.F.R. 1.482) but international search fee paid to USPTO (37 C.F.R. 1.445(a)(2) . . . . . $770.00 | | |
| Neither international preliminary examination fee (37 C.F.R. 1.482) nor international search fee (37 C.F.R. 1.445(a)(2) paid to USPTO . . . . . $1040.00 | | |
| International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) . . . . . $ 96.00 | | |
| **ENTER APPROPRIATE BASIC FEE AMOUNT =** | $ 860.00 | |
| Surcharge of $130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 C.F.R. 1.492(e)). | $ | |

| Claims | Number Filed | Number Extra | Rate | | |
|---|---|---|---|---|---|
| Total Claims | 10 - 20 = | | X $ 18.00 | $ .00 | |
| Independent Claims | 2 - 3 = | | X $ 80.00 | $ .00 | |
| Multiple Dependent Claims | | | $270.00+ | $ | |
| | | | **TOTAL OF ABOVE CALCULATIONS =** | $ 860.00 | |
| Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed. (Note 37 C.F.R. 1.9, 1.27, 1.28) | | | | $ | |
| | | | **SUBTOTAL =** | $ 860.00 | |
| Processing fee of $130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(f)). + | | | | $ | |
| | | | **TOTAL NATIONAL FEE =** | $ 860.00 | |
| Fee for recording the enclosed assignment (37 C.F.R. 1.21(h). The assignment must be accompanied by an appropriate cover sheet (37 C.F.R. 3.28, 3.31). $40.00 per property + | | | | | |
| | | | **TOTAL FEES ENCLOSED =** | $ 860.00 | |
| | | | Amount to be refunded | $ | |
| | | | charged | $ | |

a. ☒ A check in the amount of $ 860.00 to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. _____ in the amount of $ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **501519**. A duplicate copy of this sheet is enclosed.

**NOTE: Where an appropriate time limit under 37 C.F.R. 1.494 or 1.495 has not been met, a petition to revive (37 C.F.R. 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

**SEND ALL CORRESPONDENCE TO:**

**Schiff Hardin & Waite**
**Patent Department**
**6600 Sears Tower**
**Chicago, Illinois 60606**

Melvin A. Robinson
**SIGNATURE**

Melvin A. Robinson
**NAME**

31,870
**Registration Number**

09/719969

526 Rec'd PCT/PTO 18 DEC 2000



IN THE UNITED STATES ELECTED OFFICE
OF THE UNITED STATES PATENT AND TRADEMARK OFFICE
UNDER THE PATENT COOPERATION TREATY-CHAPTER II

"**SUBMITTAL OF DRAWINGS**"

APPLICANT: Jürgen KOCKMANN et al.

SERIAL NO.: EXAMINER:

FILING DATE: ART UNIT:

INTERNATIONAL APPLICATION NO.: PCT/DE98/01681

INTERNATIONAL FILING DATE: 18 June 1998

INVENTION: METHOD AND DEVICE FOR TRANSMITTING INFORMATION USING VARYING CARRIER FREQUENCIES BY MEANS OF A FREQUENCY HOPPING METHOD

Hon. Assistant Commissioner for Patents
Box PCT
Washington D.C. 20231

SIR:

Enclosed are five sheets of drawings showing Figures 1-11 as filed. Also enclosed is a second set of the drawings marked with the English translation of the German text.

Respectfully submitted,

Melvin A. Robinson (reg. no. 31,870)
Schiff Hardin & Waite
Patent Department
6600 Sears Tower
Chicago, Illinois 60606
Telephone: 312-258-5785

ATTORNEY FOR APPLICANT

09/719969
526 Rec'd PCT/PTO 18 DEC 2000



IN THE UNITED STATES ELECTED OFFICE
OF THE UNITED STATES PATENT AND TRADEMARK OFFICE
UNDER THE PATENT COOPERATION TREATY-CHAPTER II

"**PRELIMINARY AMENDMENT**"

APPLICANT: Jürgen KOCKMANN et al.

SERIAL NO.: EXAMINER:

FILING DATE: ART UNIT:

INTERNATIONAL APPLICATION NO.: PCT/DE98/01681

INTERNATIONAL FILING DATE: 18 June 1998

INVENTION: METHOD AND DEVICE FOR TRANSMITTING INFORMATION USING VARYING CARRIER FREQUENCIES BY MEANS OF A FREQUENCY HOPPING METHOD

Hon. Assistant Commissioner for Patents
Box PCT
Washington D.C. 20231

SIR:

Amend the above-identified international application before entry into the national stage before the U.S. Patent & Trademark Office under 35 U.S.C. §371 as follows:

**IN THE SPECIFICATION**

On page 1, before the title, insert --

**SPECIFICATION**

**TITLE**--;

after the title, insert --

**BACKGROUND OF THE INVENTION**

**Field of the Invention--;**

after line 7, insert --

**Description of the Related Art**--;

in line 9, before "method" insert --a--;

in line 12, before "employed" insert --which is--; and

in line 14, before "time" insert --the--.

On page 2, in line 2, delete "s"; and

in line 19, delete "To be cited as".

On substitute page 3, in line 1, delete "plurality" and insert --number--;

in line 2, after "frequency" insert --which is--;

in line 5, change "plurality" to --number--;

in line 7, before "EP-A-0 182 762" insert --European Patent Document--;

in line 14, change "US-A-5,471,503" to --U.S. Patent No. 5,471,503--;

after line 16, insert --

**SUMMARY OF THE INVENTION**--;

in line 17, change "The" to --An--;

in line 23, delete "according to the independent claims" and insert -- the method including the following steps: offering a table with a plurality of n possible carrier frequency value fx in addresses 1 through N of the table; generating a sequence of random values; reading out at least a part M of the N carrier frequency values fx from the corresponding addresses of the table on the basis of the generated sequence of random values, whereby $M \leq N$; and transmitting information in the corresponding carrier frequencies, whereby the

following steps are implemented for the setup of a connection: sampling a carrier frequency; deciding whether a message containing at least an initialization information was received on this carrier frequency during a specific time span; when the decision is negative, selecting a new carrier frequency and sampling this new carrier frequency; when the decision is positive, generating the sequence of random values upon employment of the initialization information. The apparatus includes a means for offering a table with a plurality of n possible carrier frequency value fx in addresses 1 through N of the table; a means for generating a sequence of random values; a means for reading out at least a part M of the N carrier frequency values fx from the corresponding addresses of the table on the basis of the generated sequence of random values, whereby $M \leq N$; and a means for transmitting information in the corresponding carrier frequencies, whereby a means for the setup of a connection is provided that comprises: means for sampling a carrier frequency; means for deciding whether a message containing at least an initialization information was received on this carrier frequency during a specific time span; configured such that, when the decision is negative, a new carrier frequency is selected and this new carrier frequency is sampled, and, when the decision is positive, the sequence of random values is generated upon employment of at least the initialization information.--; and

in line 24, delete "recited in the respective subclaims" and insert -- provided in that the generated sequence of random values is converted into address values between 1 and N with which the carrier frequency values are read from the table. The following steps are implemented for the synchronization: sampling a carrier frequency; deciding whether a message was received on this carrier frequency during a specific time span; when the decision is negative, selecting a new carrier frequency and sampling this new carrier frequency; when the decision is positive, generating the sequence of random values upon

employment of the message. In a preferred embodiment, a part M of the N possible carrier frequency values is read out from the table, whereby the remaining N-M carrier frequency values are employed for replacing disturbed carrier frequency values of the M carrier frequency values. Specifically, the table is updated from the N-M carrier frequency values before the read-out upon replacement of the carrier frequency values that correspond to disturbed carrier frequencies.

In the preferred apparatus, a means for converting the generated sequence of random values into address values between 1 and N with which the carrier frequency values are read from the table. A means for synchronization is provided that comprises: means for sampling a carrier frequency; means for deciding whether a message containing at least an initialization information was received on this carrier frequency during a specific time span, configured such that, when the decision is negative, a new carrier frequency is selected and this new carrier frequency is sampled, and, when the decision is positive, the sequence of random values is generated upon employment of at least the initialization information. The apparatus includes the means for readout reads a part M of the N possible carrier frequency values from the table, whereby the remaining N-M carrier frequency values are employed for replacing disturbed carrier frequency values of the M carrier frequency values. A means for updating that updates the table from the N-M carrier frequency values before the readout upon replacement of the carrier frequency values that correspond to disturbed carrier frequencies.--.

On page 5, after line 7, insert --

**BRIEF DESCRIPTION OF THE DRAWINGS**--;

in lines 9 and 10, delete "Shown are:";

in line 11, after "Fig. 1" insert --is a schematic diagram of--;

in line 13, after "Fig. 2" insert --is a graph in perspective view of--;

in line 15, after "Fig. 3" insert --is a functional block diagram showing--;

in line 16, after "Fig. 4" insert --is a graph in perspective view of-- and delete "a schematic illustration of"; and

in line 17, delete "and".

On page 6, after line 7, insert --

**DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**--; and

in line 16, change "1" to --8--.

On page 7, in line 5, after "fx" insert --1--; and

in line 9, before "duplex" insert --a--.

On page 8, in line 10, change "HF" to --RF--.

On page 9, in line 9, delete "a [...] in the" and insert --an--; and

in line 16, change "25" to --25′--.

On page 12, in line 3, change "frequency" to --frequencies--.

On page 13, in line 1, change "25" to --25′--.

On page 17, after line 13, add the following new paragraph --

Although other modifications and changes may be suggested by those

skilled in the art, it is the intention of the inventors to embody within the patent warranted hereon all changes and modifications as reasonably and properly come within the scope of their contribution to the art.--.

**IN THE CLAIMS**

On substitute page 18, line 1, change "Patent Claims" to --We Claim:--.

Amend claim 1 as follows:

1. (Amended) A method [Method] for [the] transmission of information in various carrier frequencies with [a] frequency hopping [method], comprising the following steps:

offering a table [(25)] with a plurality of n possible carrier frequency value fx in addresses 1 through N of the table [(25)];

generating [(22)] a sequence of random values;

reading out at least a part M of the N carrier frequency values fx from [the] corresponding addresses of the table [(25)] on [the] a basis of the generated sequence of random values, [whereby] $M \leq N$; and

transmitting [(4, 6)] information in the corresponding carrier frequencies, [whereby]

implementing the following steps [are implemented] for [the] setup of a connection:

sampling [(26)] a carrier frequency;

deciding [(27)] whether a message containing at least an initialization information was received on this carrier frequency during a specific time span;

when the [decision] deciding step is negative, selecting a new carrier frequency and sampling [this] said new carrier frequency; and

when the deciding step [decision] is positive, generating [(30)] the sequence of random values upon employment of the initialization information.

2.(Amended) A method [Method] according to claim 1, further comprising the step of: [characterized in that]
converting the generated sequence of random values [is converted] into address values between 1 and N with which the carrier frequency values are read from the table [(25)].

3.(Amended) A method [Method] according to claim 1 [or 2], comprising [characterized in that] the following steps: [are implemented for the]
implementing a synchronization including the steps of:
sampling [(26)] a carrier frequency;
deciding [(27)] whether a message was received on [this] said carrier frequency during a specific time span;
when the [decision] deciding step is negative, selecting a new carrier frequency and sampling said [this] new carrier frequency;
when the [decision] deciding step is positive, generating [(30)] the sequence of random values upon employment of the message.

4.(Amended) A method [Method] according to claim 1, further comprising the steps of: [one of the preceding claims, characterized in that]
reading out a part M of the N possible carrier frequency values [is read out] from the table [(25)], [whereby the] employing remaining N-M carrier frequency values [are employed] for replacing disturbed carrier frequency values of the M carrier frequency values.

5.(Amended) A method [Method] according to claim 4, further comprising the step of: [characterized in that the table (25) is updated (31)]
updating from the N-M carrier frequency values before the read-out upon

replacement of the carrier frequency values that correspond to disturbed carrier frequencies.

6.(Amended) An apparatus [Apparatus] for [the] transmission of information in various carrier frequencies with a frequency hopping method, comprising:

[a means (23) for offering] a table [(25)] with a plurality of n possible carrier frequency value fx in addresses 1 through N of the table [(25)];

a random value generator [a means (22)] for generating a sequence of random values;

a means [(23)] for reading out at least a part M of the N carrier frequency values fx from [the] corresponding addresses of the table [(25)] on [the] a basis of the generated sequence of random values, [whereby] $M \leq N$; and

transmitting apparatus [a means (4, 6)] for transmitting information in the corresponding carrier frequencies, [whereby]

a means for [the] setup [for the setup *[sic]*] of a connection includes [is provided that comprises]:

means [(26)] for sampling a carrier frequency;

means [(27)] for deciding whether a message containing at least an initialization information was received on said [this] carrier frequency during a specific time span [;] configured such that, when the decision is negative, a new carrier frequency is selected and said [this] new carrier frequency is sampled, and, when the decision is positive, the sequence of random values is generated upon employment of at least the initialization information.

7.(Amended) An apparatus [Apparatus] according to claim 6, further comprising: [characterized by]

a means for converting the generated sequence of random values into address values between 1 and N with which the carrier frequency values are read from the table [(25)].

8.(Amended) An apparatus [Apparatus] according to claim 6 [or 7], further comprising: [characterized in that]

a means for synchronization including [is provided that comprises]:

means [(26)] for sampling a carrier frequency;

means [(27)] for deciding whether a message containing at least an initialization information was received on said [this] carrier frequency during a specific time span [,] configured such that, when the decision is negative, a new carrier frequency is selected and said [this] new carrier frequency is sampled, and, when the decision is positive, the sequence of random values is generated upon employment of at least the initialization information.

9. (Amended) An apparatus [Apparatus] according to claim [one of the claims] 6 [through 8], wherein [characterized in that] the means [(31)] for readout reads a part M of the N possible carrier frequency values from the table, [whereby] the remaining N-M carrier frequency values being [are] employed for replacing disturbed carrier frequency values of the M carrier frequency values.

10. (Amended) An apparatus [Apparatus] according to claim 9, [characterized by] a means [(32)] for updating that updates the table from the N-M carrier frequency values before the readout upon replacement of the carrier

frequency values that correspond to disturbed carrier frequencies.

**IN THE ABSTRACT**

Delete the title,

Amend the first sentence to read --A method and an apparatus transmits information in various carrier frequencies with frequency hopping.--.

Delete "Figure 1" from the last line.

**REMARKS**

The foregoing amendments to the specification and claims under Article 41 of the Patent Cooperation Treaty place the application into a form for prosecution before the U.S. Patent and Trademark Office under 35 U.S.C. §371. Accordingly, entry of these amendments before examination on the merits is hereby requested.

Respectfully submitted,

Melvin A. Robinson (reg. no. 31,870)
Schiff Hardin & Waite
Patent Department
6600 Sears Tower
Chicago, Illinois 60606
Telephone: 312-258-5785

ATTORNEY FOR APPLICANT

FIG 1

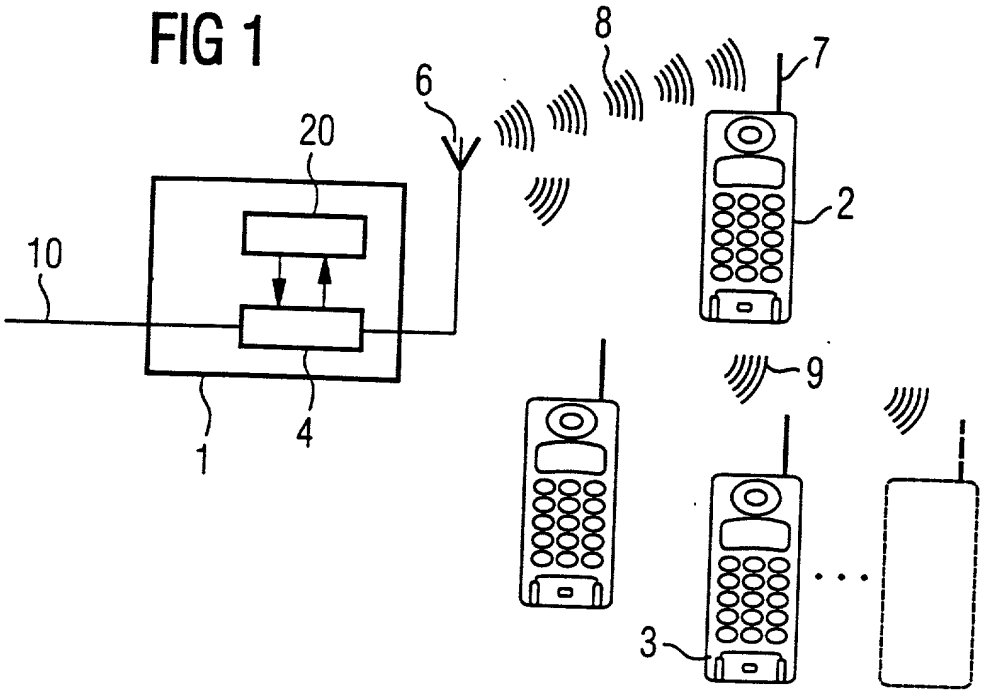

8
7
6
20
2
10
9
1
4
3

FIG 2

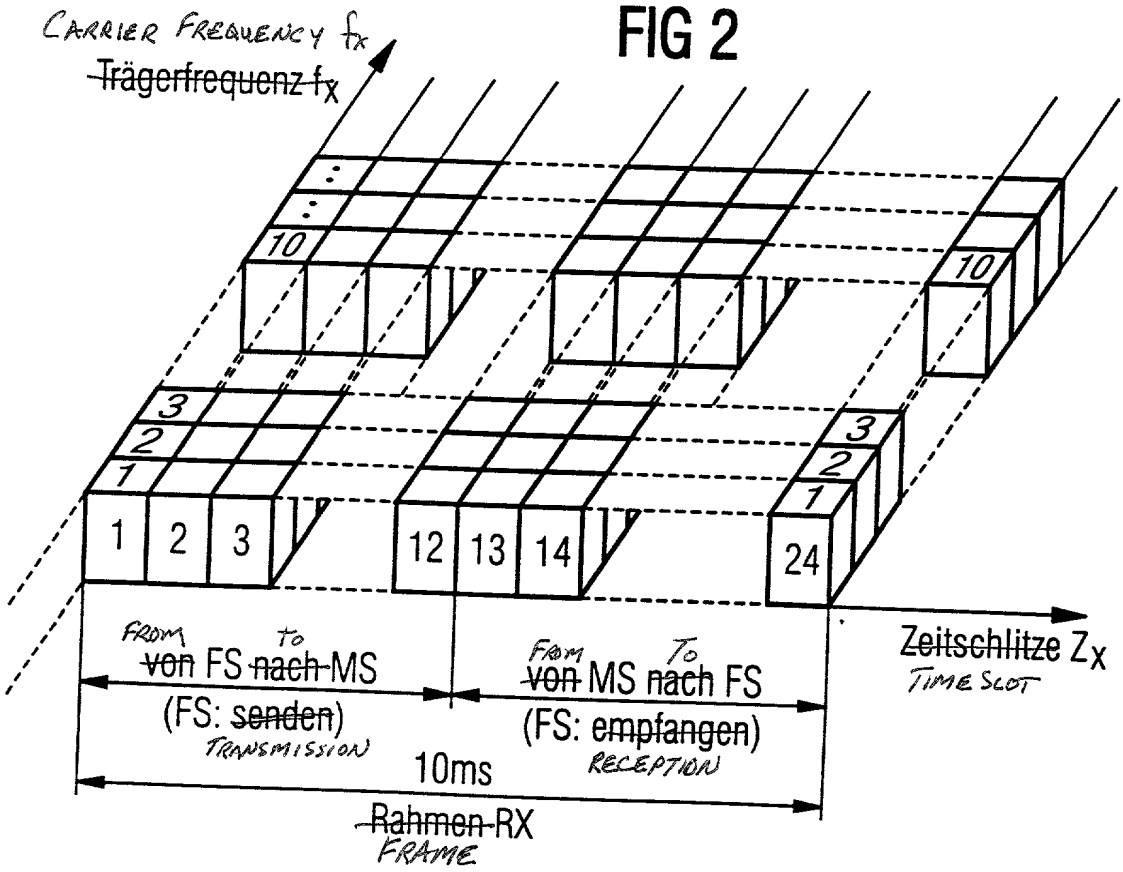

CARRIER FREQUENCY fx
~~Trägerfrequenz fx~~
10
3
2
1
1
2
3
12
13
14
24
Zeitschlitze Zx
TIME SLOT
FROM ~~von~~ FS TO ~~nach~~ MS
(FS: ~~senden~~)
TRANSMISSION
FROM ~~von~~ MS TO ~~nach~~ FS
(FS: ~~empfangen~~)
RECEPTION
10ms
~~Rahmen~~ RX
FRAME

FIG 3

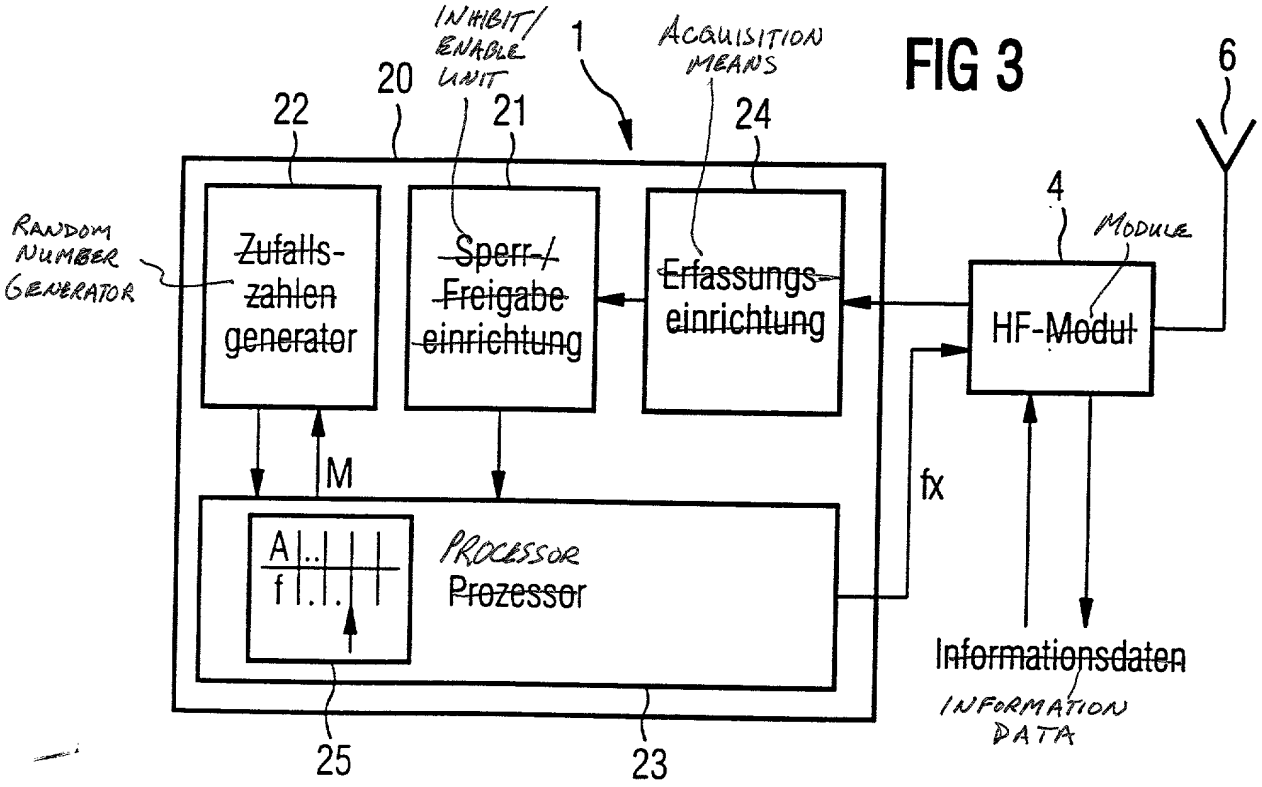

INHIBIT/ ENABLE UNIT
1
ACQUISITION MEANS
6
20
21
22
24
4
MODULE
RANDOM NUMBER GENERATOR
Zufalls- zahlen generator
Sperr-/ Freigabe einrichtung
Erfassungs- einrichtung
HF-Modul
M
fx
A
f
PROCESSOR
Prozessor
Informationsdaten
INFORMATION DATA
25
23

FIG 4

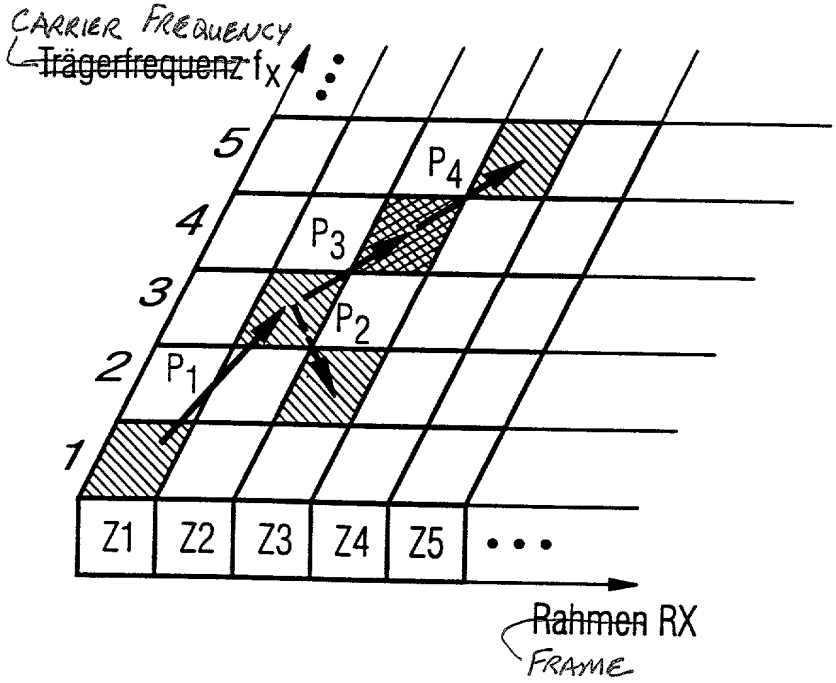

CARRIER FREQUENCY
Trägerfrequenz fx
5
4
3
2
1
P4
P3
P2
P1
Z1
Z2
Z3
Z4
Z5
Rahmen RX
FRAME

FIG 5

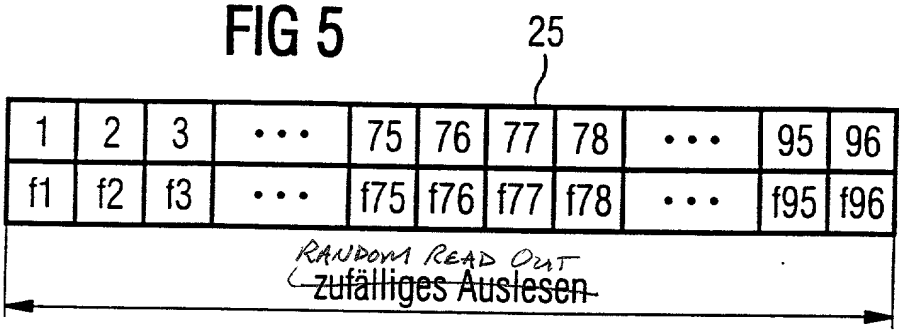

25
1
2
3
• • •
75
76
77
78
• • •
95
96
f1
f2
f3
• • •
f75
f76
f77
f78
• • •
f95
f96
RANDOM READ OUT
zufälliges Auslesen

FIG 6

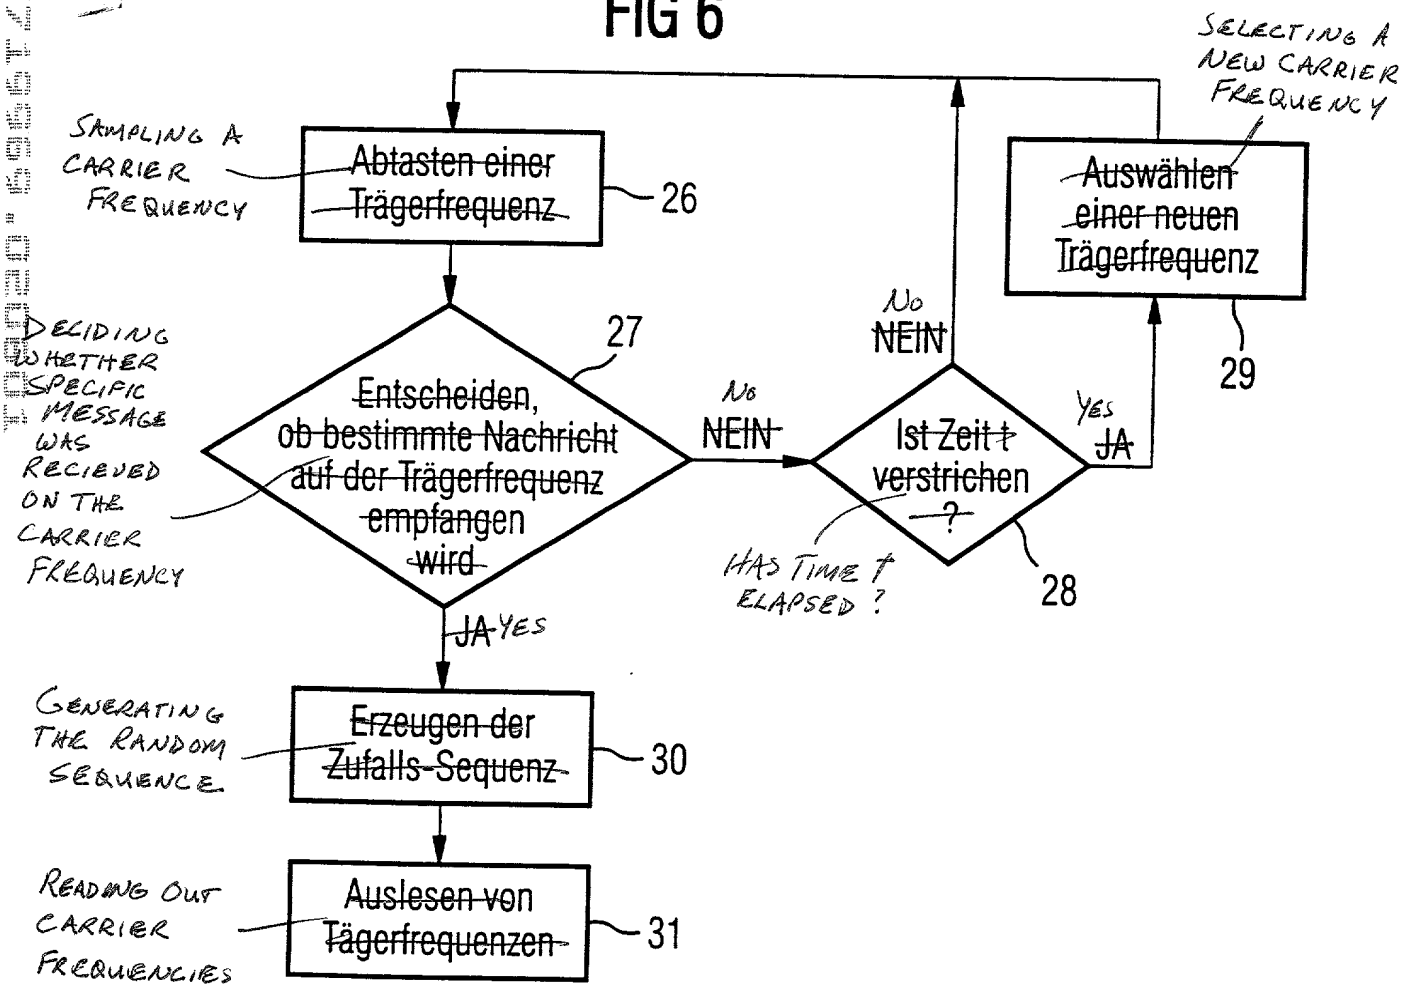

SAMPLING A CARRIER FREQUENCY
Abtasten einer Trägerfrequenz
26
DECIDING WHETHER SPECIFIC MESSAGE WAS RECIEVED ON THE CARRIER FREQUENCY
27
Entscheiden, ob bestimmte Nachricht auf der Trägerfrequenz empfangen wird
JA YES
No NEIN
Ist Zeit t verstrichen ?
HAS TIME t ELAPSED ?
28
No NEIN
Yes JA
SELECTING A NEW CARRIER FREQUENCY
Auswählen einer neuen Trägerfrequenz
29
GENERATING THE RANDOM SEQUENCE
Erzeugen der Zufalls-Sequenz
30
READING OUT CARRIER FREQUENCIES
Auslesen von Tägerfrequenzen
31

FIG 7

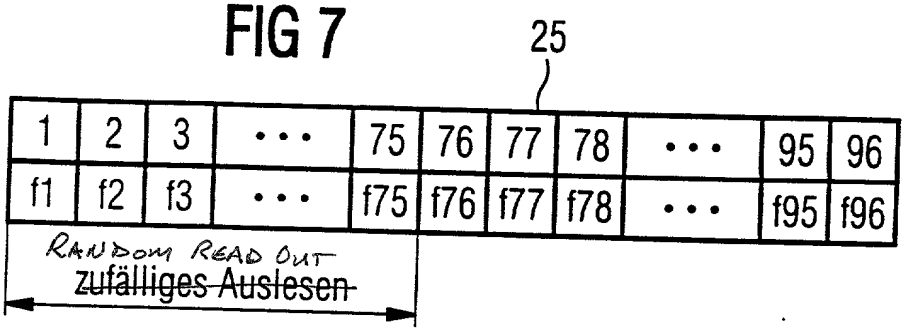

25
1
2
3
• • •
75
76
77
78
• • •
95
96
f1
f2
f3
• • •
f75
f76
f77
f78
• • •
f95
f96
RANDOM READ OUT
zufälliges Auslesen

FIG 8

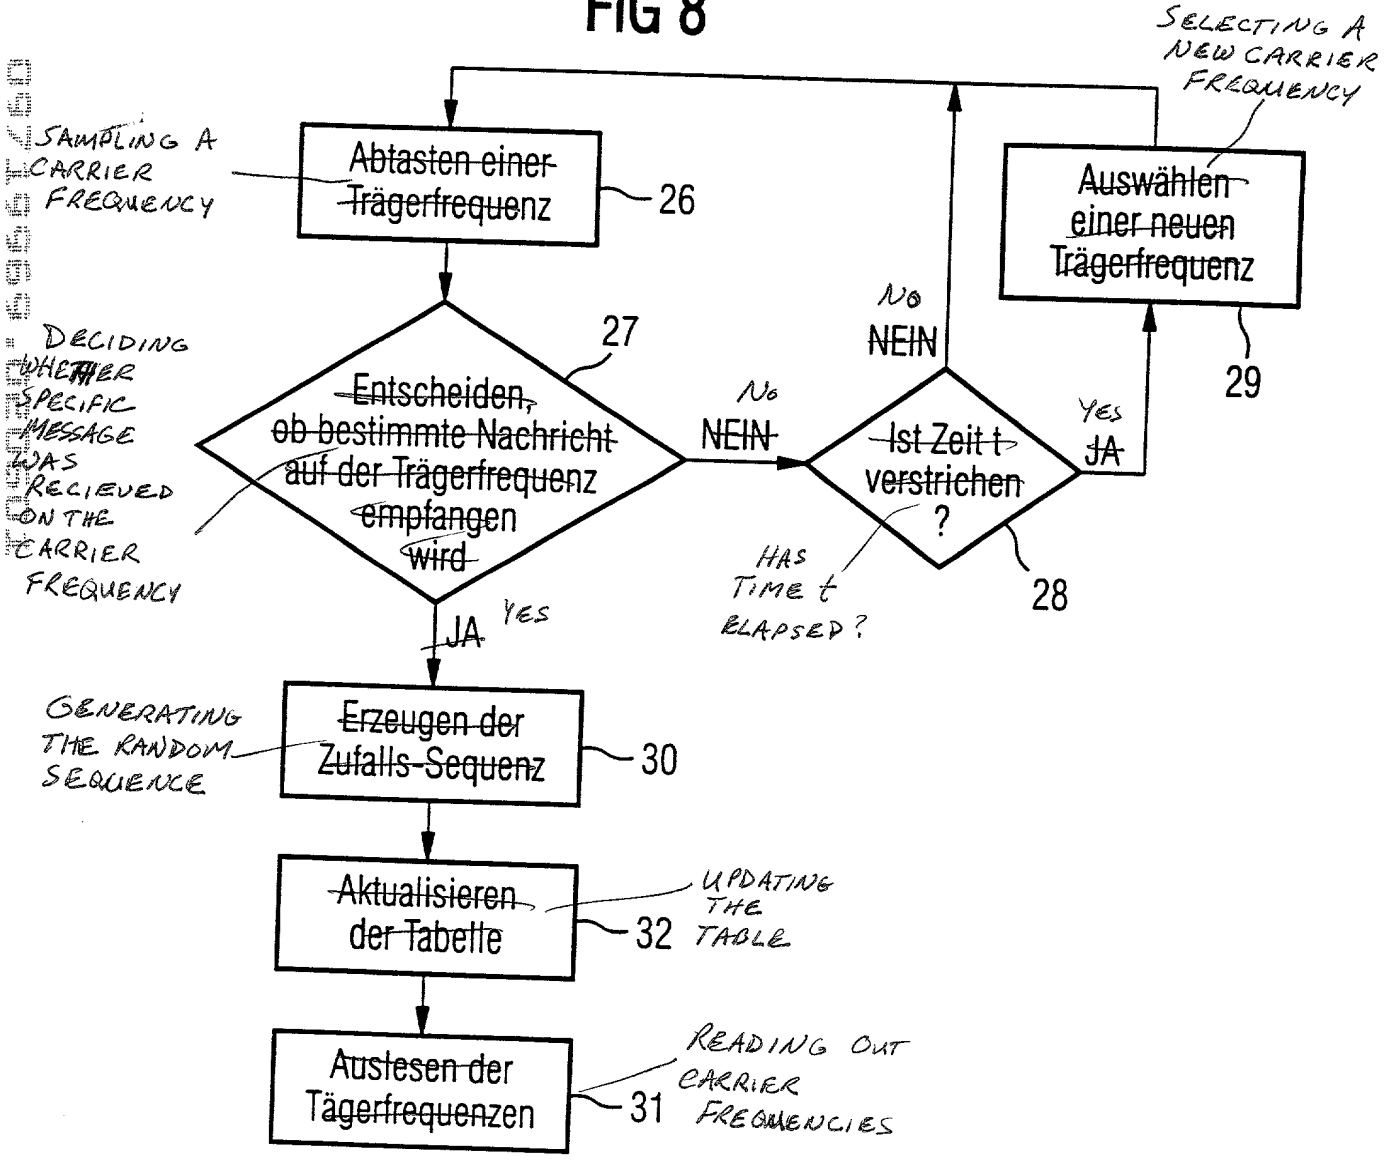

SELECTING A NEW CARRIER FREQUENCY
SAMPLING A CARRIER FREQUENCY
Abtasten einer Trägerfrequenz
26
Auswählen einer neuen Trägerfrequenz
29
DECIDING WHETHER SPECIFIC MESSAGE WAS RECIEVED ON THE CARRIER FREQUENCY
27
Entscheiden, ob bestimmte Nachricht auf der Trägerfrequenz empfangen wird
No
NEIN
Ist Zeit t verstrichen ?
28
No
NEIN
Yes
JA
HAS TIME t ELAPSED ?
JA
Yes
GENERATING THE RANDOM SEQUENCE
Erzeugen der Zufalls-Sequenz
30
Aktualisieren der Tabelle
32
UPDATING THE TABLE
Auslesen der Tägerfrequenzen
31
READING OUT CARRIER FREQUENCIES

FIG 9

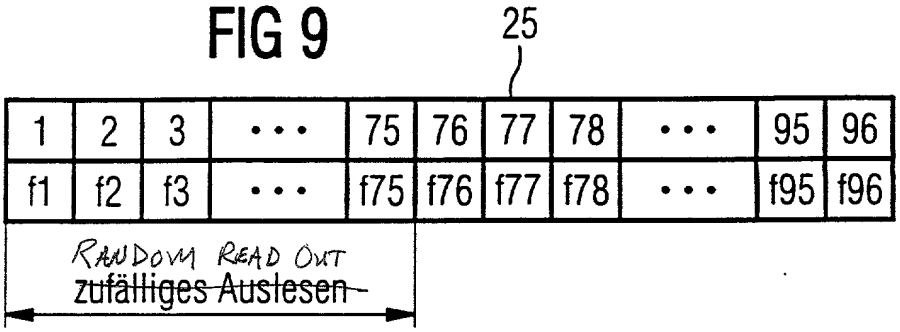



FIG 10

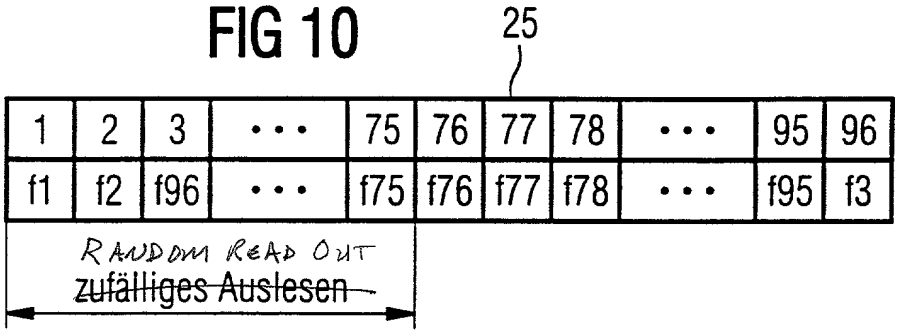
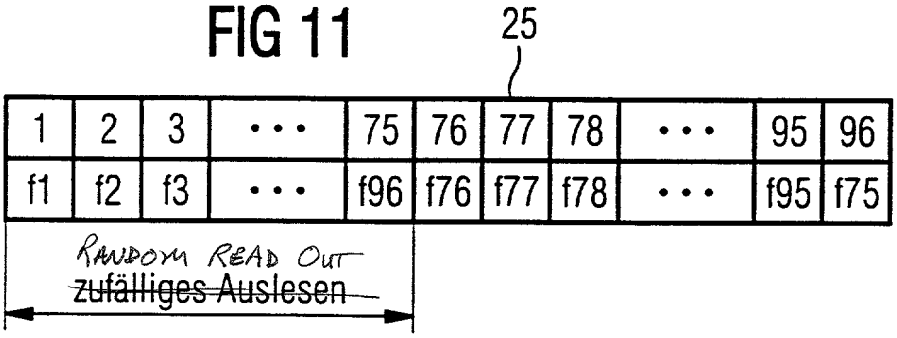



FIG 11



5/PRTS

09/719969
526 Rec'd PCT/PTO 18 DEC 2000



# METHOD AND APPARATUS FOR TRANSMITTING INFORMATION IN VARIOUS CARRIER FREQUENCIES WITH A FREQUENCY HOPPING METHOD

The present invention is directed to a method and to an apparatus for the transmission of information in various carrier frequencies with a frequency hopping method that can be implemented, for example, in a mobile station and/or a base station of a mobile radiotelephone system.

What is referred to as the frequency hopping spread spectrum system is known as method for the transmission of data. What is thereby to be understood by a frequency hopping spread spectrum system is a system wherein a plurality of carrier frequencies are offered for the radio transmission of data, and the carrier frequency currently employed is changed at periodic intervals. Particularly given a time-division multiplex system (TDMA), a change of the carrier frequency can ensue after every time slot of time frame of the time-division multiplex transmission. Such a frequency hopping spread spectrum system has advantages to the effect that the energy of the entire radio transmission is distributed over all carrier frequencies. This is particularly advantageous when a generally available frequency band such as, for example, the 2.4 GHz ISM (industrial, scientific, medical) band is employed. According to the applicable regulations (FCC part 15 in the USA), an upper limit for the maximally occurring energy per carrier frequency is defined for this frequency band in order to keep interference with other subscribers as low as possible. It is prescribed for the frequency change that at least 75 different frequencies must be used within a time span of 30 seconds. Further, each frequency may be used for a maximum of 0.4 seconds in 30 seconds. All frequencies must be used equally distributed on time average.

24 time slots, respectively 12 for uplink and for downlink, are defined in a 10 ms frame in the DECT standard. The FCC part 15, however, only makes a bandwidth of less than 1 MHz available in the ISM band. In order to meet this requirement, the plurality of time slots was reduced to 12 time slots in a 10 ms time frame, i.e. respectively 6 time slots for uplink and for downlink.

With 6 time slots for each direction and retaining the DECT time frame of 10 ms, each time slot would exhibit a length of 833 µs. The time s slots in the DECT standard have a length of 417 µs. Given a slow frequency hopping system, an inactive DECT time slot of 417 µs is required between two neighboring, active time slots wherein data are transmitted. In such systems, thus, only respectively 6 active time slots are employed for data transmission in each direction. If such systems that work on the basis of a slow frequency hopping are also to meet the requirements of the FCC part 15 in the ISM band, an inactive blind time slot of 417 µs must in turn be present between neighboring active time slots. This blind time slot thus has half the length of a full time slot of 833 µs, as a result whereof -- when a base time frame of 10 ms is retained -- four active time slots are offered in each frame for the respective uplink and downlink, a blind time slot being respectively transmitted between them. The four active time slots have a respective length of 833 µs, whereas the blind time slots comprises a respective length of 417 µs. Given this structure, the frequency programming for the frequency hopping in the next, following active time slot can continue to be implemented at the end of the preceding active time slot. The programmed start frequency in the next active time slot can thereby be set during the blind time slots.

To be cited as an advantage of the frequency hopping spread spectrum system is that the system becomes more insensitive to disturbances due to the offering of a great plurality of carrier frequencies. Over and above this, the security against tapping by third parties is enhanced in the system, since the third party generally does not know the carrier frequency to which a switch is made after a certain time span.

The sequence of carrier frequencies that are successively employed for the transmission is determined by an algorithm. Such an algorithm is identically implemented in the fixed station as well as in each mobile station of the mobile radiotelephone transmission. When, thus, a mobile part is synchronized with the appertaining fixed station, the mobile part and the fixed station undertakes the carrier frequency change predetermined by the sequence of the algorithm synchronously with one another.

09/719969
526 Rec'd PCT/PTO 18 DEC 2000



Problems occur when the plurality of usable carrier frequencies is not temporally constant. This, for example, is the case when a carrier frequency recognized as disturbed is blocked during a certain time span and, thus, is not enabled for employment and, for example, is enabled for reëmployment after a certain time span. Even given such a plurality of carrier frequencies fluctuating over time, it must be assured that, for example, the aforementioned FCC part 15 rules are adhered to.

EP-A-0 182 762 discloses a method in a telecommunication system having two transmission/reception stations that selects carrier frequencies according to the frequency hopping method, whereby new carrier frequencies are selected from a matrix with available frequencies by generating a sequence of random numbers that reference the position of a respective carrier frequency in the matrix and on the basis of status information for the respective frequency likewise stored in the matrix, so that they can be read out in a next step.

US-A-5,471,503 discloses a method for sampling a reception signal in a telecommunication working according to the frequency hopping method, whereby each channel checks for an existing transmission.

The object of the present invention is to create a method and an apparatus for the transmission of information in various carrier frequencies with a frequency hopping method wherein a simple and effective offering of the carrier frequencies is assured.

This object is achieved by a method and an apparatus for the transmission of information in various carrier frequencies with a frequency hopping method according to the independent claims. Advantageous developments of the present invention are recited in the respective subclaims.

According to the invention, a table having a plurality of M possible carrier frequency values fx is offered in addresses 1 through N of the table. Further, a sequence of random values is generated on whose basis at least a part M of the N carrier frequency fx is read out from the corresponding addresses of the table, whereby $M \leq N$ applies. Subsequently, information are transmitted in the carrier frequencies corresponding to the carrier frequency values. The inventive

apparatus can, for example, be a mobile station or a base station as well of a mobile radio telephone system.

The generated sequence of random values is converted into address values between 1 and N with which the carrier frequency values fx are read from the table.

Advantageously, one carrier frequency is sampled first for setting up a connection, for example between mobile radio telephone units. Then a decision is made as to whether a specific message was received on this carrier frequency during a specific time span. When the decision is negative, a new carrier frequency is

Copy provided by USPTO from the PIRS Image Database on 06/23/2004

selected and this new carrier frequency is sampled. When the decision is positive, the table is initialized and the sequence of random values is generated upon employment of the received, specific message. This is advantageous particularly in a mobile station of a mobile radio telephone system to which a specific message is communicated from a base station, this making it possible for the mobile station to begin the sequence of random values for reading out the carrier frequency values at the address at which the mobile station is likewise located at the moment. Since the same sequence of random values is generated in the mobile station and the base station, the same sequence of carrier frequency values is thus subsequently read out from the table. The same method is employed for synchronizing, for example, mobile radio telephone units since, for example, a mobile station likewise thereby requires a message from the base station on whose basis it can continue to read carrier frequency values from the table at the same location of the random sequence.

Advantageously, only one part M of the possible carrier frequency values is read out from the table, whereby the remaining N - M carrier frequency values are employed for replacing disturbed carrier frequency values of the M carrier frequency values.

When setting up a connection, for example between mobile radio telephone units, or when synchronizing, for example, mobile radio telephone units, can thereby be updated before the readout upon replacement of the carrier frequency values that correspond to the disturbed carrier frequencies from the N - M carrier frequency values. In the case of a mobile station, for example, this can receive a message regarding which carrier frequencies are disturbed from a base station wherein the disturbed carrier frequencies were acquired. On the basis of this message, the disturbed carrier frequency values are then updated by non-disturbed carrier frequency values from the N-M carrier frequency values. The table is updated in the same way as well in the corresponding base station. It is to be emphasized again that the base station and the mobile station respectively

comprise the identical table and the identical algorithm for generating the sequence of random values.

The aforementioned method steps are implemented in corresponding devices in the inventive apparatus. The inventive apparatus for the transmission of information in various carrier frequencies with a frequency hopping method can thereby be implemented, for example, in a mobile station or in a base station of a mobile radio telephone system.

The invention is now explained in greater detail on the basis of an exemplary embodiment and with reference to the accompanying drawings. Shown are:

Fig. 1 a mobile radio telephone transmission system with an inventive fixed station;

Fig. 2 a time frame of a data transmission standard as employable given the present invention;

Fig. 3 details of the internal structure of an inventive base station;

Fig. 4 a schematic illustration of a frequency hopping spread spectrum system, particularly for the case of a jammer-evasion mode as well; and

Fig. 5 shows a table from which carrier frequency values are randomly read on the basis of a random sequence;

Fig. 6 shows a flow chart that shows a method for setting up a connection between or, respectively, for the synchronization of two mobile radial telephone units;

Fig. 7 shows a table from which only a part of the carrier frequency values is read out randomly on the basis of a random sequence;

Fig. 8 shows a flow chart that illustrates a method for setting up a connection between or, respectively, for the synchronization of, for example, two mobile radio telephone units, whereby disturbed carrier frequency values can be replaced by non-disturbed carrier frequency values;

Fig. 9 shows a table from which only a part of the carrier frequency values are randomly read out on the basis of a random sequence;

Fig. 10 shows the table from Fig. 9, whereby a disturbed carrier frequency value from the carrier frequency values that are read out is replaced by a non-disturbed carrier frequency value; and

Fig. 11 shows the table of Fig. 10, whereby another disturbed carrier frequency value is replaced by a non-disturbed carrier frequency value.

With reference to Figure 1, the general structure of a mobile radio telephone transmission shall be explained first. As generally standard, the arrangement for radio transmission of data comprises a fixed station 1 and a plurality of mobile parts (mobile stations), cordless telephones 2, 3... . The fixed station 1 is connected to the fixed network with a terminal line 10. An interface means (not shown) can be provided for communication between the fixed station and the terminal line 10. The fixed station 1 comprises an antenna 6 with which, for example, a communication with the mobile part 2 occurs via a first radio transmission path 1 or with the mobile part 3 via a second radio transmission path 9. The mobile parts 2, 3...comprise a respective antenna 7 for the reception or, respectively, the transmission of data. In Fig. 1, the condition is schematically shown wherein the fixed station 1 actively communicates with the mobile part 2 and thus exchanges data therewith. The mobile part 3, in contrast, is in what is referred to as the idle locked mode wherein, standby-like, it waits for a call from the fixed station 1. In this condition, the mobile part 3 does not communicate with the fixed station 1 in the actual sense but receives the data of, for example, a time slot from the fixed station 1 at periodic intervals in order to be able to resynchronize its carrier frequencies fx.

The internal structure of the fixed station 1 is schematically shown in Fig. 1. The voice information data are supplied to a RF module 4 that is driven by

a carrier frequency sequence unit. The exact structure of an inventive fixed station 1 shall be described later.

With reference to Fig. 2, a transmission standard shall now be explained of a type that can be employed given the present invention. As can be seen from Fig. 2, data are transmitted on a plurality of carrier frequency fx - 10 thereof being shown - in chronological succession in a plurality of time slots, 24 time slots Zx in the illustrated case, being transmitted in a time-division multiplex method in TDMA (time division multiple access). In the illustrated case, work is thereby carried out in duplex mode, i.e. following the transmission of the first 12 time slots Zx, a switch is made to reception and the twelve time slots (Z13 through Z24) are received from the fixed station in the opposite direction.

When what is referred to as the DECT standard is employed for the transmission, the time duration of a time frame amounts to 10 ms and 24 time slots Zx are provided, namely 12 time slots for the transmission from the fixed station to mobile parts and another 12 time slots Zx for the transmission from the mobile parts to the fixed station. According to the DECT standard, ten carrier frequencies fx are provided between 1.88 GHz and 1.90 GHz.

Of course, other frame structures are also suitable for employment in the present invention, for example those wherein the number of time slots per frame is cut in half compared to the DECT standard.

The present invention is particularly employed for transmissions in what is referred to as the 2.4 GHz-ISM (Industrial, Scientific, Medical) frequency band. The generally accessible ISM frequency band comprises a bandwidth of 83.5 MHz. According to the rule FCC part 15, at least 75 carrier frequencies must be distributed over these 83.5 MHz. A division of the bandwidth of 83.5 MHz onto 96 carrier frequencies is especially advantageous, i.e. a channel spacing of 864 kHz. The aforementioned frequency bands and standards are cited merely as examples. A fundamental precondition for an applicability in the present invention is merely that what is referred to is a frequency hopping spread spectrum is employed, i.e.

that a plurality of carrier frequencies are available and that the carrier frequency selected for the transmission is changed from time to time. A precondition for such a change is that the data are transmitted in time slots Zx (time-division multiplex method). Thus, for example, the DECT standard is suitable, as is any other modified standard based on this DECT standard.

With reference to Fig. 3, the internal structure of an inventive fixed station 1 shall now be explained in greater detail. As can be seen in Fig. 3, information data are supplied to the RF module 4 when transmission is to be carried out from the fixed station 1 to a mobile part 2, 3...with the antenna 6, and the HF module 4 outputs information data when data when data are received from mobile parts. The RF module 4 modulates the digitally encoded information data onto a carrier frequency fx. The carrier frequency fx to be currently employed is thereby prescribed by a carrier frequency sequence unit, which is referenced 20 overall. An acquisition means 24 to which the demodulated signal is supplied from the RF module 4 is provided in the carrier frequency sequence unit 20. Disturbance thereby means that either a disturbance in the actual sense or an occupancy by some other transmitter is present. A disturbance in the sense the present specification can thus be acquired in that a received signal is demodulated on a carrier frequency and acquired as to whether a signal level is present on this carrier frequency or not. A disturbed carrier frequency is thus a carrier frequency onto which a signal is modulated that exceeds a specific threshold.

Alternatively to the blocking, the A-CRC value, the X-CRC value, a loss of synchronization or the RSSI value can be utilized.

On the basis of the demodulated signal from the RF module 4, for example, the acquisition means 24 thus determines how high the signal part modulated onto a specific carrier frequency fx is. When the acquired signal part lies above a predetermined limit value, the acquisition means 24 outputs a disturbance acquired signal to an inhibit/enable unit 21. Dependent on the disturbance acquisition signal from the acquisition means 24, the inhibit/enable unit 21

forwards an inhibit/enable information to a processor 23. This inhibit/enable information indicates which of the carrier frequencies fx are inhibited or, respectively, re-enabled due to the acquisition of a disturbance by the acquisition means 24, as shall be explained in later.

The acquisition means 24 and the inhibit/enable means 21 thus creates an independent procedure with which disturbed frequencies can be inhibited and re-enabled. In addition to being supplied with the inhibit/enable information from the inhibit/enable unit 21, the processor 23 is supplied with a sequence from a random generator 22. On the basis of a [...] in the implied random algorithm, the random generator 22 generates a randomly distributed sequence of carrier frequency values within the useable frequency band. The random generator 22 thus implements a procedure independent of the procedure of frequency blocking for the case of a disturbance. The processor 23, finally, outputs a drive signal to the RF module 4 that prescribes the carrier frequency value to be employed for the RF module 4.

The processor 23 comprises a table 25 provided in a memory whose function and administration shall be explained later.

With reference to Fig. 4, the operation of a fixed station 1 or, respectively, the method shall be explained in greater detail. As shown in Fig. 4, for example, a carrier frequency f1 is employed during a frame Rx of a mobile radio transmission, as shown shaded in Fig. 4. This frequency f1 is thus the first value of the sequence generated by the random generator 22 that is supplied to the processor 23, which in turn correspondingly drives the RF module 4. Let it be assumed for the frame R2 that the random generator 22 prescribes a frequency hop P1 onto a carrier frequency f3 on the basis of its calculated frequency.

Let the case now be assumed that the acquisition means 24, for example in a prior transmission, has acquired that the carrier frequency f2 is disturbed, and the acquisition means 24 has thus forwarded a corresponding disturbance signal to the inhibit/enable unit 21 that in turn indicates an inhibit of the frequency f2 to the

processor 23. Let it also be assumed that the random generator 22 prescribes the carrier frequency f2 previously acquired as disturbed on the basis of its identified sequence for the frame R3. Proceeding from the coincidence of the prescribed carrier frequency f2 according to the sequence of the random generator 22 and, simultaneously, the inhibit signal from the inhibit/enable unit 21 for the same carrier frequency f2, the processor 23 now replaces the carrier frequency f2 that was actually prescribed but was acquired as disturbed for the frame R3 by a carrier frequency that was not acquired as disturbed by the acquisition means 24, for example the carrier frequency f4, as indicated by the frequency hop arrow P3. Instead of the carrier frequency 2 actually prescribed by the sequence, thus, the RF module 4 is driven onto the alternate carrier frequency f4. By replacing the carrier frequency acquired as disturbed, thus, a modified sequence of carrier frequencies is created. The modified sequence thereby comprises only undisturbed carrier frequencies. As a result thereof that a carrier frequency acquired as disturbed is replaced and not skipped, the positions of the undisturbed carrier frequencies in the modified sequence upon transition to the following carrier frequency is not modified compared to the original sequence.

The basis of this modified sequence composed of only undisturbed carrier frequency fx is thus formed by two superimposed, mutually independent procedures (random generator 22 or, respectively, inhibit/enable unit 21). This inhibit can be in turn canceled by the inhibit/enable unit 21 as soon as a renewed acquisition by the acquisition means 24 indicates that the previously disturbed carrier frequency is now no longer disturbed. In this case, the inhibit/enable unit 21 provides an enable signal to the processors 23 that indicates that the processor 23 now no longer need replace the previously disturbed carrier frequency by a different carrier frequency.

Alternatively, the inhibit/enable unit 21 can automatically output an enable signal to the processor 23 without renewed acquisition by the acquisition means 24 as soon as a predetermined time duration has expired. Each of said

procedures thus independently assures that the entire, predetermined frequency spectrum is utilized uniformly distributed. Standards are thus adhered to by the adaptation of the times in the procedure for inhibiting frequencies.

Let the U.S. rule FCC part 15 be cited as an example of such a standard. This rule prescribes that at least 75 different frequencies must be used given a frequency hopping spread spectrum system within a time span of thirty seconds. Each frequency is thereby allowed to be used for a maximum of 0.4 seconds in 30 seconds. Over and above this, all frequencies must be used equally distributed on average.

The fixed station 1 is the master in the frequency allocation, i.e. the random generator in a mobile part is initialized at the beginning of a connection setup with the status of the random number generator 22 of the fixed station 1. Subsequently, the random number generators in a mobile part 2, 3... and in the fixed station 1 generate the same carrier frequency values synchronously in the frame clock and autonomously from one another.

The mobile part comprises essentially the same structure as the fixed station 1. Like the fixed station 1, the mobile part likewise comprises a carrier frequency sequence unit 20 with a random number generator 22 and a processor 23 that contains a table 25. The table 25 is identical to the table 25 of the fixed station 1. The mobile station, however, does not comprise the acquisition means 24 and the inhibit/enable means 21. Disturbed carrier frequencies are thus only acquired in the fixed station or, respectively, base station and communicated to the corresponding mobile stations. An acquisition of disturbed carrier frequencies can also occur in the mobile stations, whereby the mobile stations comprise the structure shown in Fig. 3 in this case. The method for transmitting information or, respectively, data in the corresponding carrier frequencies in the mobile stations corresponds to the corresponding method in the base station.

The procedure for frequency blocking that is implemented by the acquisition means 24 and the inhibit/enable unit 21 employs a unidirectional

protocol on the air interface during the entire connection time between the fixed station 1 and a mobile part 2, 3... . When the acquisition means 24 finds one of the ultimately possible frequency fx of the fixed station 1 to be disturbed, then the fixed station 1 thus informs all mobile parts with which it is maintaining an active connection that this disturbed frequency - when it is generated by the frequency of the random number generator - is to be replaced by another carrier frequency acquired as being not disturbed. The frequency inhibit is in turn canceled by the inhibit /enable unit 21 when the inhibited carrier frequency is again suitable for the transmission or, respectively, when it was inhibited for longer than a previously defined time.

It can be seen in Fig. 3 that, for example, a table 25 provided in a memory is allocated to the processor 23. With reference to Fig. 3 as well as to Fig. 5 through Fig. 11, it shall now be explained how the carrier frequencies fx are inventively offered. As can be seen in Fig. 5, all carrier frequencies fx available overall are entered into a table 25, for example 96 carrier frequencies fx.

As can be seen in Fig. 5, the carrier frequency values $f_1$ through $f_{96}$ are entered in corresponding addresses 1 through 96 of the table 25 in their numerical sequence. This sequence of the carrier frequency values fx, however, is only envisioned as an example. The carrier frequency values fx can, for example, be stored in the table 25 in a different sequence.

The number of carrier frequency values fx present overall, 96 in the present example, is referenced N. According to U.S. rule FCC part 15, at least 75 different frequencies must be used in a time span of 30 seconds.

It is assumed in the example explained in Figs. 5 and 6 that no carrier frequency is disturbed, so that all 96 carrier frequencies can be employed for the transmission of data. Given the example explained in Figs. 7 and 8, only a part M of the 96 carrier frequencies, namely 75 carrier frequencies, are transmitted; these, when one of them is disturbed, can be replaced from the remaining 21 carrier frequencies.

The table 25 permanently stored in the table 25 in the mobile station and in the base station or, respectively, fixed station is read out with a random number generator 22 that is identical for the base station and the fixed station. The carrier frequency values fx read out in the processor 23, which is likewise respectively present in the base station and in the mobile station, are converted into the corresponding carrier frequencies in the RF module 4. Subsequently, data or, respectively, information are transmitted in the carrier frequencies. Each carrier frequency value fx is present only a single time in the table 25.

Figure 6 shows a flow chart that shows the setup of a connection between a mobile station and a base station or, respectively, the synchronization of a mobile station to a base station. The executive sequences are identical in both instances. The method execution shown in Fig. 6 is, in particular, implemented in the mobile stations that are dependent on the respective base station. A corresponding means in the respective mobile radial telephone unit that, for example, can be a mobile station is allocated to each of the method steps shown in Fig. 6. In a first step 26, a selected carrier frequency is sampled in a corresponding means. In a next step 27, a determination or, respectively, decision is made in a corresponding means as to whether a specific message was received on the selected carrier frequency. The specific message can thereby, for example, be a $N_t$ message in the A-field of the DECT standard. Other, corresponding messages can be employed in other standards. When it is found in step 27 that the specific message was not received, a check is carried out in a step 28 in a corresponding means as to whether a specific time duration t has elapsed. When the specific time duration t has not elapsed, then the sampling of the selected carrier frequency is continued in step 26. When the time duration t has elapsed, then a new carrier frequency is selected in a step 29 in a corresponding means. The new carrier frequency is correspondingly sampled in the step 26.

When the decision in step 27 is positive, i.e. when it is found that the specific, anticipated message was received on the carrier frequency, the random

number sequence permanently prescribed by the random number generator 22 is generated in a corresponding means in a step 30. The specific, received message is thereby employed to start the generation of the random number sequence in the random number generator 22 at the position at which the mobile unit from which the specific message was received is located at the moment. This is necessary in order to assure that the two, data-exchanging mobile radio telephone units are synchronized with one another and employ the random sequence of carrier frequencies for the transmission of data synchronously with one another. In step 30, thus, the random number sequence is generated beginning with the position prescribed by the specific message and is employed for the readout of carrier frequency values proceeding from the corresponding address in the table 25. The readout of carrier frequency values fx ensues in a step 31 in a corresponding means in the processor 23 of the corresponding mobile radio telephone unit. The random number values that are generated by the random number generator 22 are thereby converted into address values between 1 and N, i.e. into address values between 1 and 96 in the present example, with which the carrier frequency values fx are read out from the table 25.

Figure 7 shows a table 25 wherein only a part M = 75 of the total of N = 96 carrier frequency values fx are read out from corresponding addresses 1 through 75. As was already explained above, for example, at least 75 different frequencies must be used in a time span of 30 seconds according to U.S. rule FCC part 15. This requirement is satisfied by the readout of the first 75 carrier frequency values from the corresponding addresses 1 through 75 from the table 25 according to Fig. 7. The remaining carrier frequency values from the addresses 76 through 96 can thereby be employed for replacing or, respectively, updating disturbed carrier frequency values in the first 75 carrier frequency values. The random number generator 22 in the mobile station and the base station therefore outputs no sequences that comprise N different values; on the contrary, it is adequate when it outputs M different values corresponding to the carrier

frequencies actually available. As was explained with reference to Fig. 3, for example, one or more disturbed carrier frequencies are thereby identified in a fixed station. In response thereto, the fixed station outputs a corresponding signal to the mobile station regarding which frequencies are disturbed. The carrier frequency values in the table 25 in the base station and the mobile station that correspond to disturbed carrier frequencies are subsequently replaced by non-disturbed carrier frequency values from the addresses 76 through 96. Of course, this replacement and updating of the disturbed carrier frequency values must ensue synchronously in the base station and in the mobile station. Further, the identification of disturbed carrier frequencies could also ensue in the respective mobile station that sends a corresponding message to allocated base stations.

Figure 8 shows a flow chart that explains the setup of a connection between mobile radio telephone units or, respectively, the synchronization of mobile radio telephone units when only a part M of the existing N carrier frequency values is read out from the table 25. The corresponding method steps of the flow chart of Figure 5 have corresponding devices in the respective mobile radio telephone unit allocated to them.

In a first step 26, a selected carrier frequency is sampled in a corresponding means. In a step 27, a decision is made in a corresponding means as to whether a specific message was received on the selected carrier frequency. When this is not the case, a finding is made in a step 28 as to whether a time duration t has elapsed. The step 27 and the step 28 can be implemented in a common step in a common means. When it is found that the time duration t has not elapsed, then the selected carrier frequency is re-sampled in the step 26. When it is found that the time duration t has elapsed, then a new carrier frequency is selected in a step 29 in a corresponding means and is correspondingly sampled in the step 26.

When the decision in the step 27 is positive, i.e. when it is found that a specific message is received on the sampled carrier frequency, then the random sequence is generated by the random number generator 22 upon employment of the

received message. The specific message can thereby, for example, be the $N_t$ message in the A-field in the DECT standard. In other standards, of course, other messages can be employed. The specific message thereby informs the random number generator 22 regarding the position proceeding from which the random sequence should be started. In other words, the specific message indicates the position at which the random number generator 22 of that mobile radio telephone unit that sends the specific message is located at the moment, so that the random number generator 22 of the receiving mobile radio telephone unit to be synchronized can generate the random sequence proceeding from the same position.

In a step 32, the table is updated in a corresponding means on the basis of a further, received message. When, for example, the base station finds that a specific carrier frequency is disturbed, then it communicates a message to, for example, a receiving mobile station as to which carrier frequency is disturbed and with which carrier frequency from the addresses 76 through 96 of the table 25 the disturbed carrier frequency value should be replaced. In a step 31, the carrier frequencies are read out from the addresses 1 through 75 of the table 25 in a corresponding means.

Figures 9 through 11 show how disturbed carrier frequency values in the addresses 1 through 75 of the table 25 are replaced by non-disturbed carrier frequency values from the addresses 76 through 96. Figure 9 thereby shows a table 25 that corresponds to the table 25 of Figure 7. A part M, for example 75, of carrier frequency values fx is read out from corresponding addresses 1 through M on the basis of the random number sequence generated by the random number generator 22. When it is found that, for example, the carrier frequency that corresponds to the carrier frequency value $f_3$ is disturbed, then the carrier frequency values $f_{96}$, which is not disturbed, is substituted for the carrier frequency value $f_3$, as shown in Figure 10. The non-disturbed carrier frequency value $f_{96}$ is thus located at the address 3, and the disturbed carrier frequency value $f_3$ is located at the address 96. Since the addresses 1 through 75 are always read out on the basis of the random

sequence, it is thus assured that only non-disturbed carrier frequencies are employed for the transmission of data. When it is also found that the carrier frequency that corresponds to the carrier frequency value $f_{75}$ is disturbed and that the carrier frequency value $f_3$ is no longer disturbed, then the carrier frequency value $f_3$ is first reset to its original address 3, and the carrier frequency value $f_{96}$ is reset to its original address 96. Subsequently, the disturbed carrier frequency value $f_{75}$ is set to the address 96, and the non-disturbed carrier frequency $f_{96}$ is set to the address 75, as shown in Figure 11. Since the table is permanently prescribed, it is thus assured that the carrier frequency values are always present at their fixed addresses except when they are disturbed.

The values N = 96 and M = 75 are merely exemplary in the above description and can be replaced by other values dependent on the requirements of the standard to be met.

**Patent Claims**

1. Method for the transmission of information in various carrier frequencies with a frequency hopping method, comprising the following steps:

offering a table (25) with a plurality of n possible carrier frequency value fx in addresses 1 through N of the table (25);

generating (22) a sequence of random values;

reading out at least a part M of the N carrier frequency values fx from the corresponding addresses of the table (25) on the basis of the generated sequence of random values, whereby $M \leq N$; and

transmitting (4, 6) information in the corresponding carrier frequencies, whereby the following steps are implemented for the setup of a connection:

sampling (26) a carrier frequency;

deciding (27) whether a message containing at least an initialization information was received on this carrier frequency during a specific time span;

when the decision is negative, selecting a new carrier frequency and sampling this new carrier frequency;

when the decision is positive, generating (30) the sequence of random values upon employment of the initialization information.

2. Method according to claim 1, characterized in that the generated sequence of random values is converted into address values between 1 and N with which the carrier frequency values are read from the table (25).

3. Method according to claim 1 or 2, characterized in that the following steps are implemented for the synchronization:

sampling (26) a carrier frequency;

deciding (27) whether a message was received on this carrier frequency during a specific time span;

when the decision is negative, selecting a new carrier frequency and sampling this new carrier frequency;

when the decision is positive, generating (30) the sequence of random values upon employment of the message.

4. Method according to one of the preceding claims, characterized in that a part M of the N possible carrier frequency values is read out from the table (25), whereby the remaining N-M carrier frequency values are employed for replacing disturbed carrier frequency values of the M carrier frequency values.

5. Method according to claim 4, characterized in that the table (25) is updated (31) from the N-M carrier frequency values before the read-out upon replacement of the carrier frequency values that correspond to disturbed carrier frequencies.

6. Apparatus for the transmission of information in various carrier frequencies with a frequency hopping method, comprising

a means (23) for offering a table (25) with a plurality of n possible carrier frequency value fx in addresses 1 through N of the table (25);

a means (22) for generating a sequence of random values;

a means (23) for reading out at least a part M of the N carrier frequency values fx from the corresponding addresses of the table (25) on the basis of the generated sequence of random values, whereby $M \leq N$; and

a means (4, 6) for transmitting information in the corresponding carrier frequencies, whereby a means for the setup for the setup [sic] of a connection is provided that comprises:

means (26) for sampling a carrier frequency;

means (27) for deciding whether a message containing at least an initialization information was received on this carrier frequency during a specific time span; configured such that, when the decision is negative, a new carrier frequency is selected and this new carrier frequency is sampled, and,

when the decision is positive, the sequence of random values is generated upon employment of at least the initialization information.

7. Apparatus according to claim 6, characterized by a means for converting the generated sequence of random values into address values between 1 and N with which the carrier frequency values are read from the table (25).

8. Apparatus according to claim 6 or 7, characterized in that a means for synchronization is provided that comprises:

means (26) for sampling a carrier frequency;

means (27) for deciding whether a message containing at least an initialization information was received on this carrier frequency during a specific time span, configured such that, when the decision is negative, a new carrier frequency is selected and this new carrier frequency is sampled, and, when the decision is positive, the sequence of random values is generated upon employment of at least the initialization information.

9. Apparatus according to one of the claims 6 through 8, characterized in that the means (31) for readout reads a part M of the N possible carrier frequency values from the table, whereby the remaining N-M carrier frequency values are employed for replacing disturbed carrier frequency values of the M carrier frequency values.

10. Apparatus according to claim 9, characterized by a means (32) for updating that updates the table from the N-M carrier frequency values before the readout upon replacement of the carrier frequency values that correspond to disturbed carrier frequencies.

Ersatzblatt (Regel 26)

**Abstract**

METHOD AND APPARATUS FOR TRANSMITTING INFORMATION IN VARIOUS CARRIER FREQUENCIES WITH A FREQUENCY HOPPING METHOD

The present invention is directed to a method and to an apparatus for the transmission of information in various carrier frequencies with a frequency hopping method. A table 25 with a plurality of n possible carrier frequency values fx in addresses 1 through N of the table 25 is thereby offered. Further, a sequence of random values is generated, for example in a random number generator 22, on the basis whereof a part M of the N carrier frequency values fx is read from the corresponding addresses of the table 25, whereby $M \leq N$ applies. Information are subsequently transmitted in the corresponding carrier frequencies. The inventive apparatus or, respectively, the inventive method can be implemented, for example, in a mobile station and/or a base station of a mobile radiotelephone system.

Figure 1

FIG 1

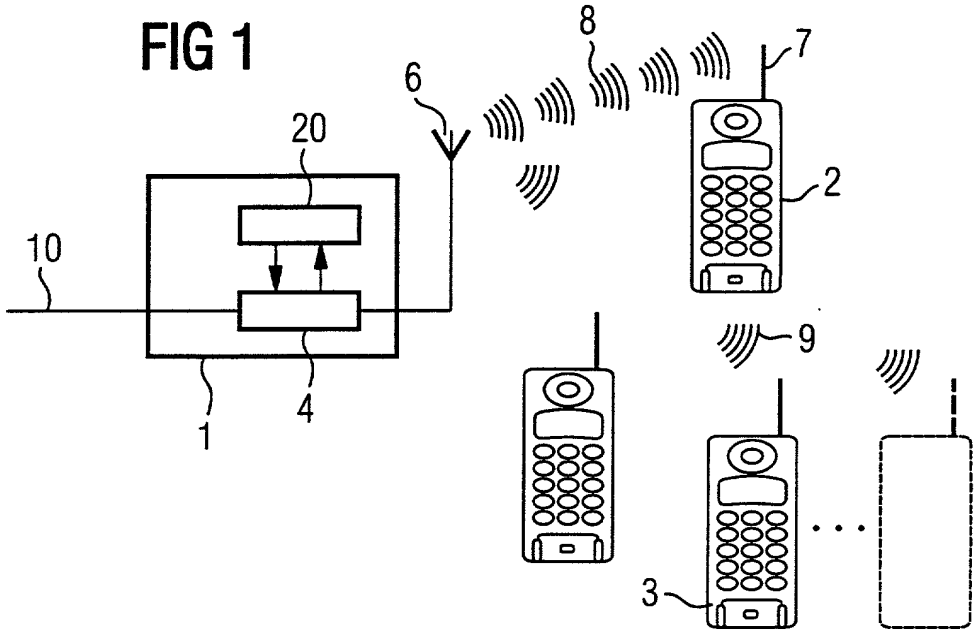

8
7
6
20
2
10
9
1
4
3

FIG 2

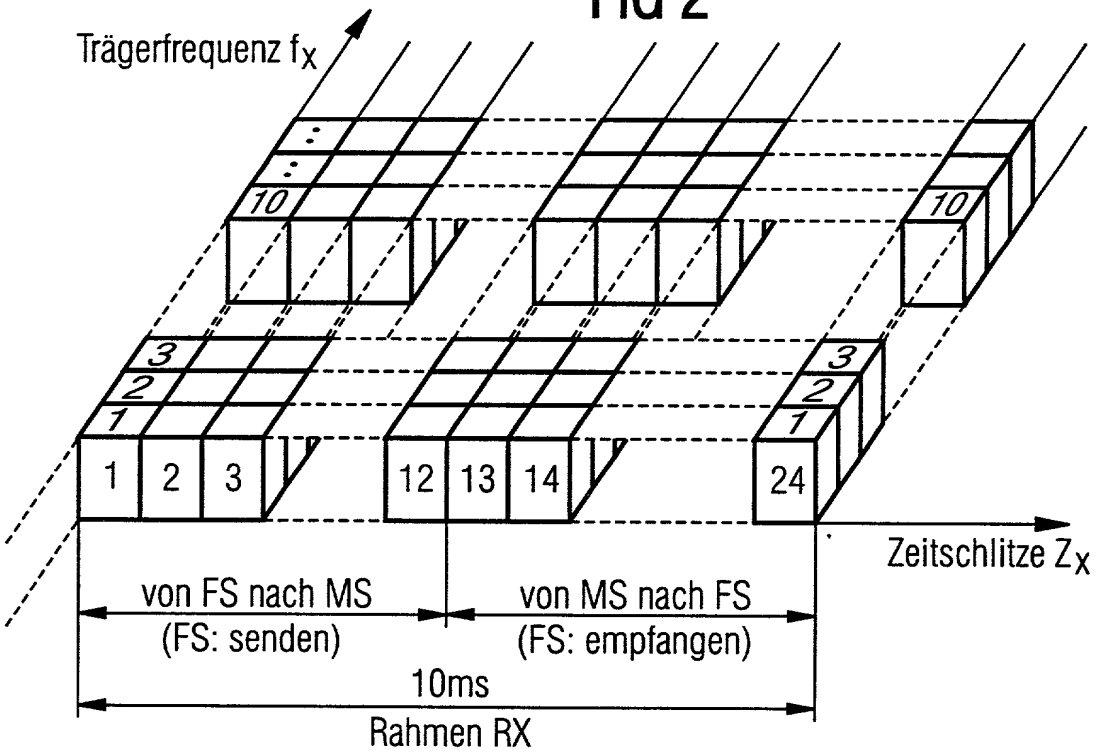

Trägerfrequenz $f_X$
10
3
2
1
1
2
3
12
13
14
24
Zeitschlitze $Z_X$
von FS nach MS
(FS: senden)
von MS nach FS
(FS: empfangen)
10ms
Rahmen RX

FIG 3

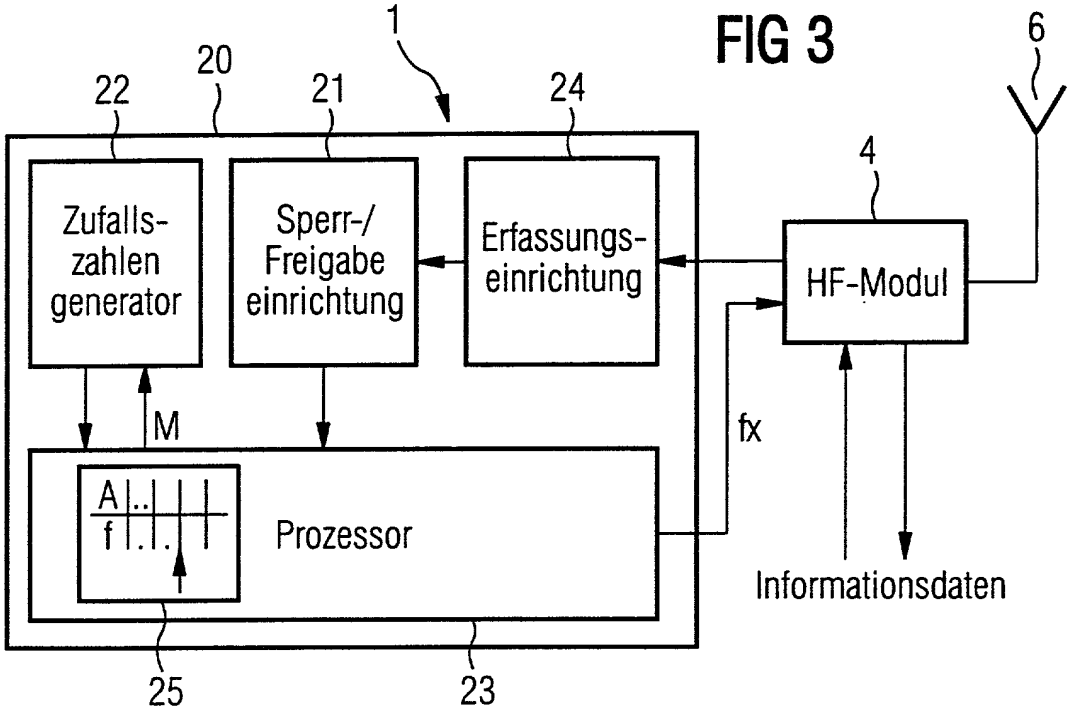

1
20
22
21
24
6
4
Zufalls-
zahlen
generator
Sperr-/
Freigabe
einrichtung
Erfassungs-
einrichtung
HF-Modul
M
fx
A
f
Prozessor
Informationsdaten
25
23

FIG 4

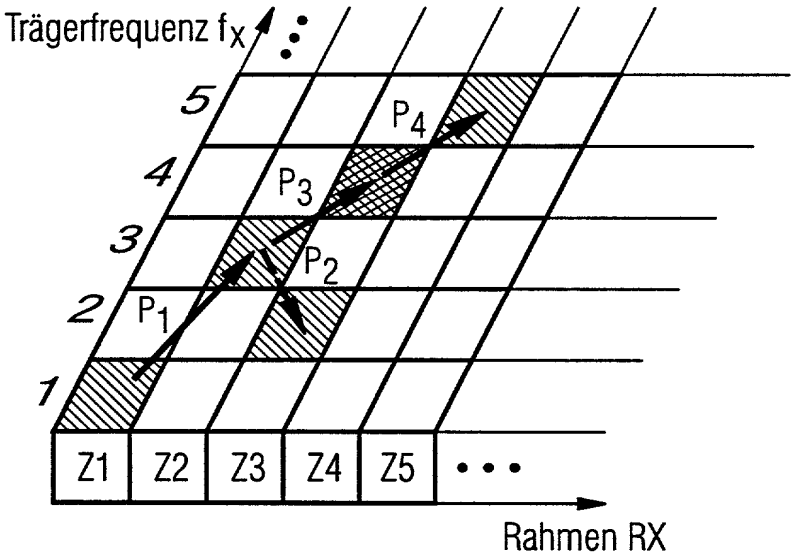

Trägerfrequenz $f_X$
5
4
3
2
1
$P_1$
$P_2$
$P_3$
$P_4$
Z1
Z2
Z3
Z4
Z5
Rahmen RX

FIG 5

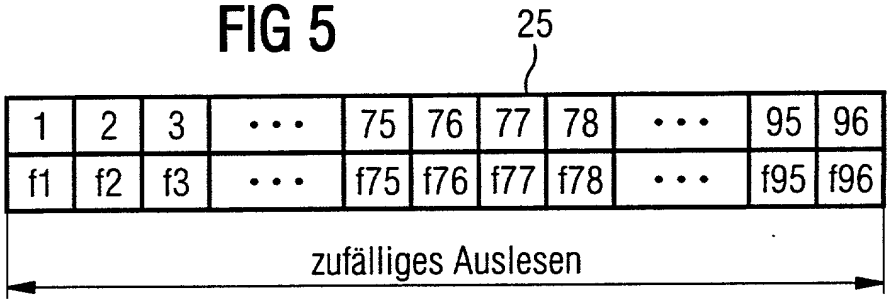

25
1
2
3
• • •
75
76
77
78
• • •
95
96
f1
f2
f3
• • •
f75
f76
f77
f78
• • •
f95
f96
zufälliges Auslesen

FIG 6

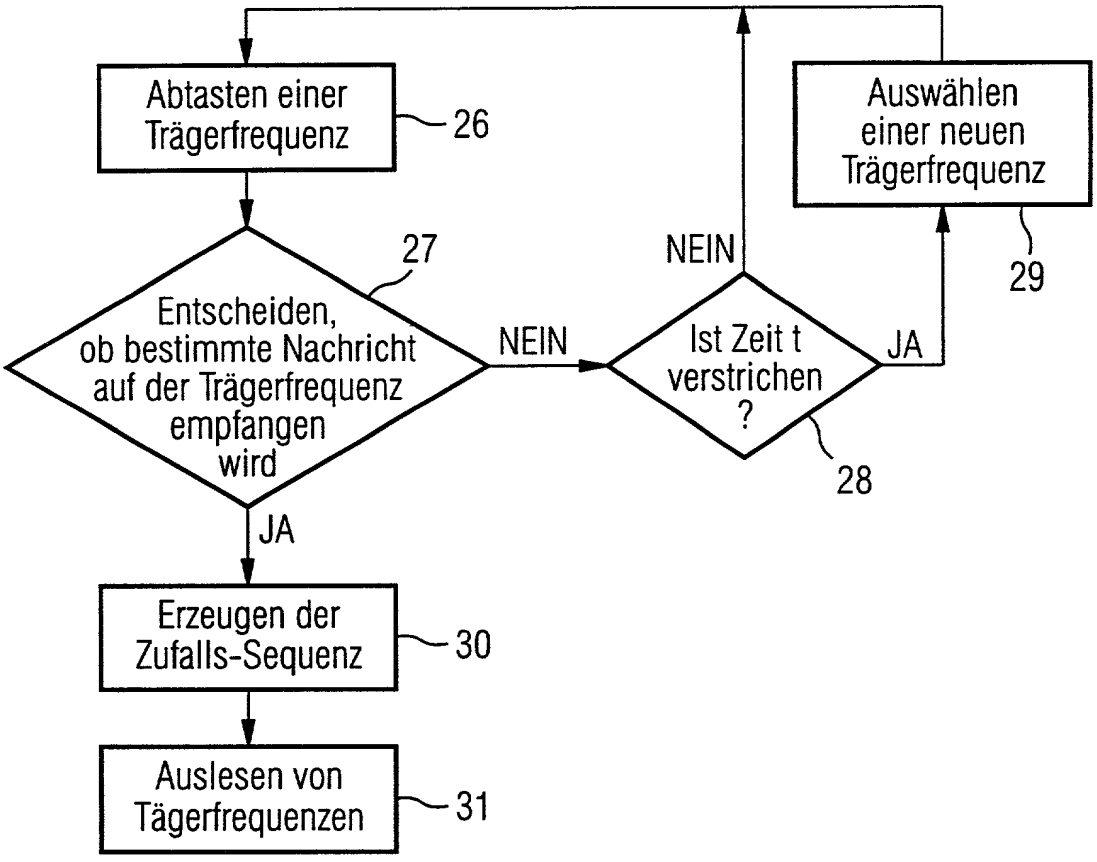

Abtasten einer Trägerfrequenz
26
Entscheiden, ob bestimmte Nachricht auf der Trägerfrequenz empfangen wird
27
NEIN
Ist Zeit t verstrichen ?
28
JA
NEIN
Auswählen einer neuen Trägerfrequenz
29
JA
Erzeugen der Zufalls-Sequenz
30
Auslesen von Tägerfrequenzen
31

FIG 7

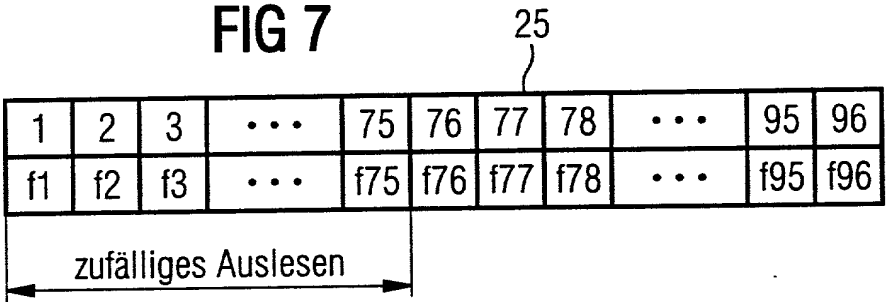

25
1
2
3
• • •
75
76
77
78
• • •
95
96
f1
f2
f3
• • •
f75
f76
f77
f78
• • •
f95
f96
zufälliges Auslesen

FIG 8

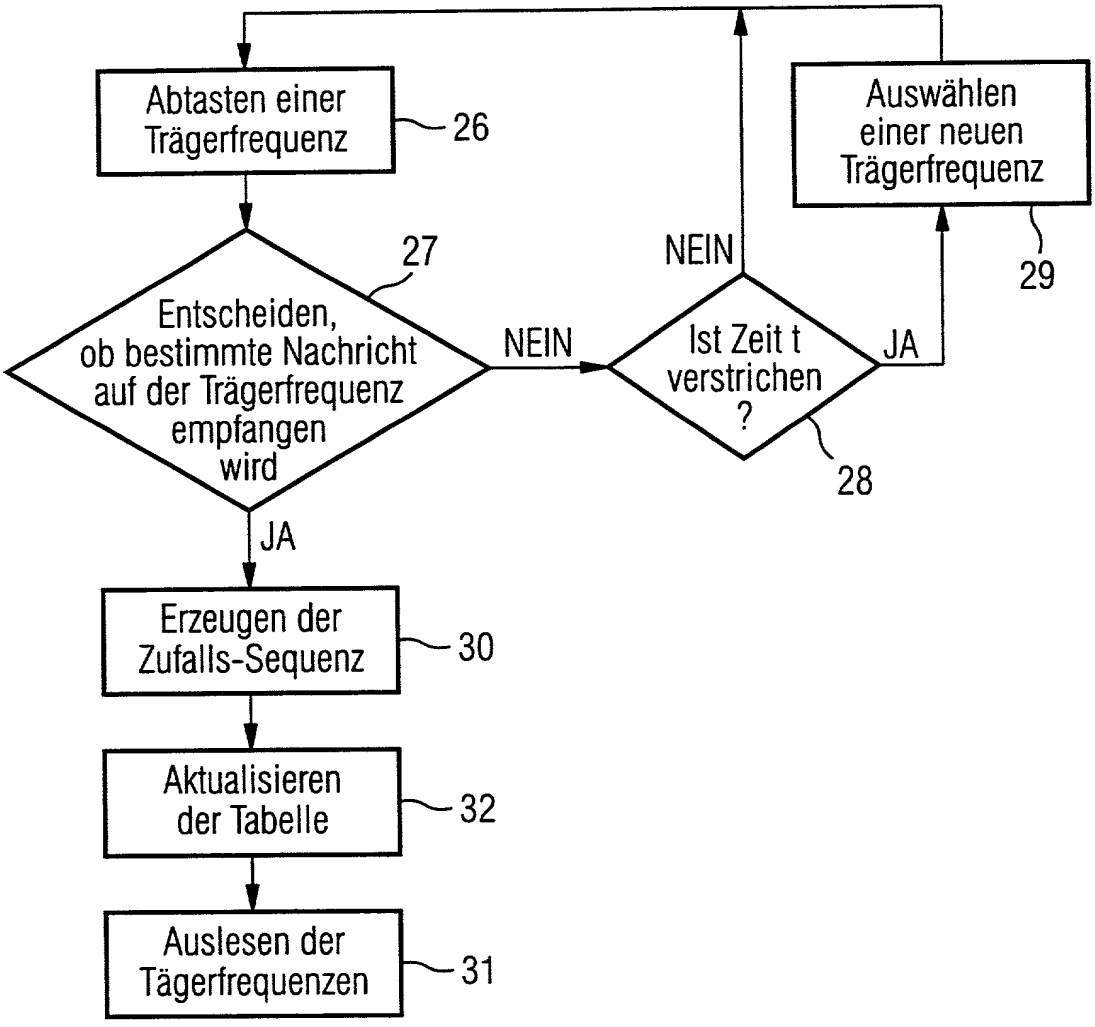

Abtasten einer Trägerfrequenz
26
Entscheiden, ob bestimmte Nachricht auf der Trägerfrequenz empfangen wird
27
NEIN
Ist Zeit t verstrichen ?
28
NEIN
JA
Auswählen einer neuen Trägerfrequenz
29
JA
Erzeugen der Zufalls-Sequenz
30
Aktualisieren der Tabelle
32
Auslesen der Tägerfrequenzen
31

FIG 9

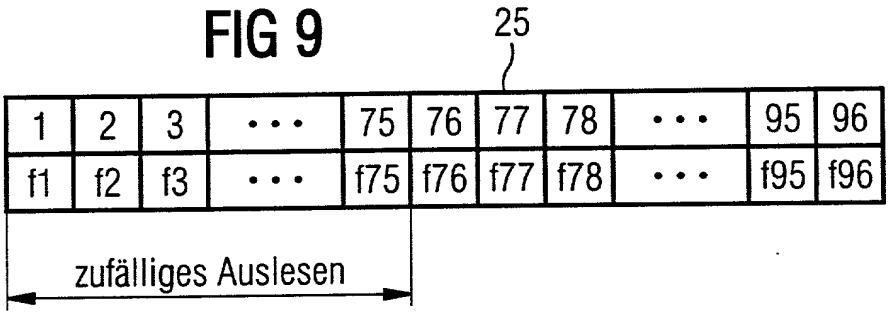



FIG 10

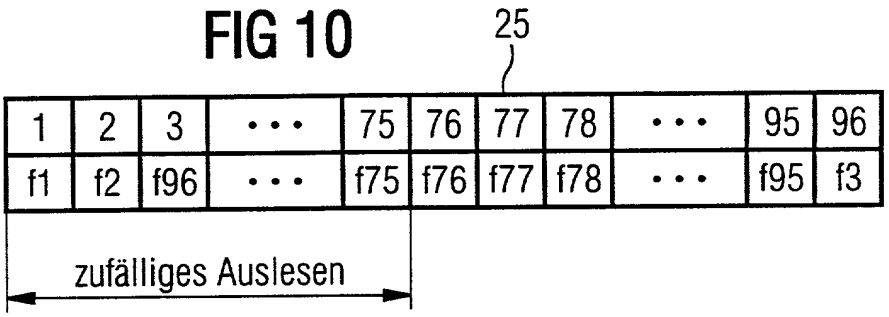
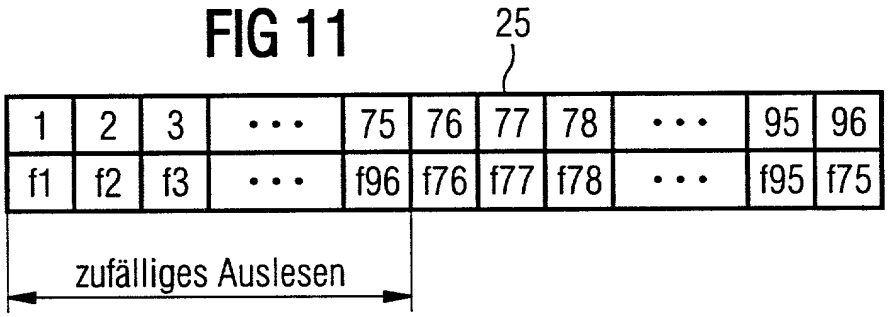



FIG 11



990/1909 WO US

# DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION
## *ERKLÄRUNG FÜR PATENTANMELDUNGEN MIT VOLLMACHT*
## German Language Declaration

O I P E
FEB 0 6 2001
PATENT & TRADEMARK OFFICE

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

As a below named inventor, I hereby declare that:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

My residence, post office address and citizenship are as stated below next to my name,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für des dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

VERFAHREN UND VORRICHTUNG ZUR ÜBERTRAGUNG VON INFORMATIONEN IN VERSCHIEDENEN TRÄGERFREQUENZEN MITTELS EINEM FREQUENZSPRUNGVERFAHREN

METHOD AND DEVICE FOR TRANSMITTING INFORMATION USING VARYING CARRIER FREQUENCIES BY MEANS OF A FREQUENCY HOPPING METHOD

deren Beschreibung

the specification of which

(zutreffendes ankreuzen)

(check one)

☐ hier beigefügt ist.

☐ is attached hereto

■ am 18 June 1998 als
PCT internationale Anmeldung
PCT Anmeldungsnummer PCT/DE98/01681
eingereicht wurde und am _____
abgeändert wurde (falls tatsächlich abgeändert)

■ was filed on _____ as
PCT international application
PCT Application No. _____
and was amended on _____
(if applicable)

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

O I P E JC55
FEB 0 6 2001
PATENT & TRADEMARK OFFICE

## German Language Declaration

Prior foreign applications
Priorität beansprucht

| (Number)<br>(Nummer) | (Country)<br>(Land) | (Day Month Year Filed)<br>(Tag Monat Jahr eingereicht) | Priority Claimed<br>☐ Yes<br>Ja | <br>☐ No<br>Nein |
|---|---|---|---|---|
| (Number)<br>(Nummer) | (Country)<br>(Land) | (Day Month Year Filed)<br>(Tag Monat Jahr eingereicht) | ☐ Yes<br>Ja | ☐ No<br>Nein |

Ich beanspruche hiermit germäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozeßordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code. §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122 I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

| (Application Serial No.)<br>(Anmeldeseriennummer) | (Filing Date)<br>(Anmeldedatum) | (Status)<br>(patentiert, anhängig, aufgegeben) | (Status)<br>(patented, pending, abandoned) |
|---|---|---|---|
| (Application Serial No.)<br>(Anmeldeseriennummer) | (Filing Date)<br>(Anmeldedatum) | (Status)<br>(patentiert, anhängig, aufgegeben) | (Status)<br>(patented, pending, abandoned) |

Ich erkläre hiermit, dass alle von mir in der vorliegenden Eklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden koennen, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

O I P E
FEB 0 6 2001
JC55
PATENT & TRADEMARK OFFICE

## German Language Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: (Name und Registrationsnummer anführen)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

(e) And I hereby appoint Messrs. John D. Simpson (Registration No. 19,842), Steven H. Noll (28,982), Brett A. Valiquet (27,841), James D. Hobart (24,149), Melvin A. Robinson (31,870), and Mark Bergner (45,877)), all members of the firm of Schiff Hardin and Waite.

---

Telefongespräche bitte richten an:
(Name und Telefonnummer)

Direct Telephone Calls to: (name and telephone number)

312/258-5785

---

Postanschrift:

Send Correspondence to:

**SCHIFF HARDIN & WAITE**
**Patent Department**
**6600 Sears Tower, Chicago, Illinois 60606**


---

| | |
|---|---|
| Voller Name des einzigen oder ursprünglichen Erfinders: Jürgen KOCKMANN | Full name of sole or first inventor: |
| Unterschrift des Erfinders / Datum: X [signature] X 12/11/01 | Inventor's signature / Date |
| Wohnsitz: Gronau, Germany DEX | Residence |
| Staatsangehörigkeit: German | Citizenship |
| Postanschrift: Oststrasse 52 | Post Office Address |
| D-48599 Gronau, GERMANY | |

(Bitte entsprechende Informationen und Unterschriften im Falle von weiteren Miterfindern angeben).

(Supply similar information and signature for subsequent joint inventors).

2-00



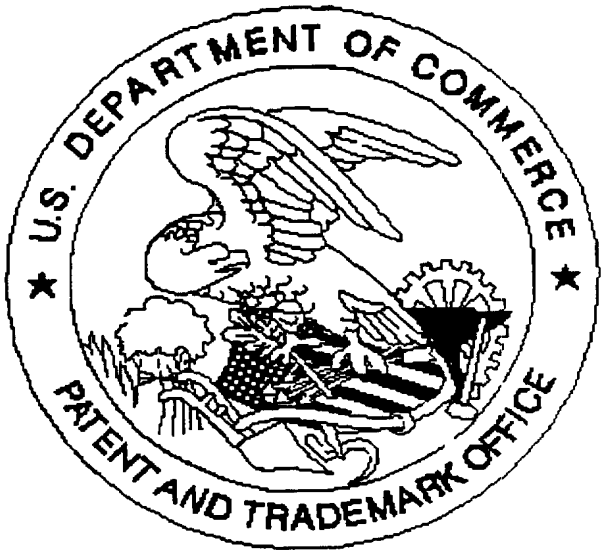

| | |
|---|---|
| Voller Name des zweiten Miterfinders (falls zuttreffend):<br>Olaf DICKER | Full name of second joint inventor, if any: |
| Unterschrift des Erfinders Datum<br>Olaf Dicker 18/1/01 | Inventor's signature Date<br>Olaf Dicker |
| Wohnsitz<br>Rees, Germany DEX | Residence |
| Staatsangehörigkeit<br>German | Citizenship |
| Postanschrift<br>~~Kapitelstrasse 4~~ Emmericher Str. 25 | Post Office Address |
| D-46459, Germany | |
| Voller Name des dritten Miterfinders (falls zuttreffend): | Full name of third joint inventor, if any: |
| Unterschrift des Erfinders Datum | Inventor's signature Date |
| Wohnsitz | Residence |
| Staatsangehörigkeit | Citizenship |
| Postanschrift | Post Office Address |
| | |
| Voller Name des vierten Miterfinders (falls zuttreffend): | Full name of fourth joint inventor, if any: |
| Unterschrift des Erfinders Datum | Inventor's signature Date |
| Wohnsitz | Residence |
| Staatsangehörigkeit | Citizenship |
| Postanschrift | Post Office Address |
| | |

(Bitte entsprechende Informationen und Unterschriften im Falle von zweiten und weiteren Miterfindern angeben).

(Supply similar information and signature for second and subsequent joint inventors).

# United States Patent & Trademark Office

Office of Initial Patent Examination -- Scanning Division




SCANNED, # 6

Application deficiencies found during scanning:

☐ Page(s)_____ of _____ were not present for scanning. (Document title)

☐ Page(s)_____ of _____ were not present for scanning. (Document title)

☐ ***Scanned copy is best available.***

There are 5 sheets of drawing